



82 HP | **MF 4700**



FROM MASSEY FERGUSON



Page 04
Introduction to the MF 4708



Page 06
New workhorses of the world



Page 08
The muscle to tackle any task



Page 09
Easy-to-operate transmissions



Page 11
Easy on the operator

Contents

- 04 Introduction to the MF 4700
- 06 New workhorses of the world
- 08 The muscle to tackle any task
- 09 Easy-to-operate transmissions
- 11 Worldwide tractors from a global brand
- 11 Easy on the operator
- 12 Power any implement
- 12 In total control
- 14 Product features
- 14 Supported by the worldwide might of AGCO and Massey Ferguson
- 15 Specifications



Page 12
Power any implement



Page 14
Product features

MF 4708

Since the inception of the brand, Massey Ferguson has produced more than four million tractors in the 60-120hp bracket. It's a power sector that once represented the largest tractors available, yet now accounts for a size of machine found in almost every farming operation around the world. From haulage in Africa, through livestock farm tasks in Europe, to rice cultivation in Asia and lifestyle block chores in North America, and a multitude of tasks and locations in between, these are the tractors the world's farmers depend on day-in, day-out. - the new Massey Ferguson Global Series.





A NEW TRACTOR FOR A NEW WORLD

Designed from the ground up, manufactured to exacting standards. Built in the latest high-technology facilities. Performance like no other world tractor.

The new workhorses of the world

With the new Global Series, Massey Ferguson has taken the concept of the sub-100hp tractor and re-engineered it from the ground up to meet the needs of present and future farming. In this power bracket, no other range on the market today offers such an array of build specifications, options and accessories, all designed to help tailor your machine exactly the way you need it for your farming operation.

In-built reliability, integral dependability

Massey Ferguson engineers have farming in their blood. They know exactly how crucial it is that a tractor meets the challenges that the vagaries of nature can put in the way of any farming activity. So whether it's making the most of short weather windows to complete jobs in the field, or battling through the elements to ensure livestock are looked after, these are machines that can be relied on all year round, in all weathers, in all environments. With the MF 4700 Series each component and every assembly has been designed to ensure rock-solid reliability and dependable operation.

MF 4700






The muscle to tackle any task

Renowned for reliability, ruggedness and fuel economy, a 4.4-litre AGCO Power four-cylinder engine provides the heart of the 82hp Massey Ferguson 4708 model, providing 342Nm of torque at 2,200rpm. With both tractor and engine coming from the same manufacturer, you can be sure that product quality is on exactly the same level, while compatibility and efficiency cannot be bettered.

Efficient on fuel, low on noise

The engines used in MF 4700 Series tractors are all of a long stroke design that provides high levels of torque across a broad speed range. Maximum torque is achieved at low engine speeds: 1500 revs/min on the MF 4708 model. With a low rated engine speed of only 2200 revs/min, not only is diesel use minimised, but so too are both noise and wear and tear, resulting in lower fuel bills and a more pleasant operator experience.



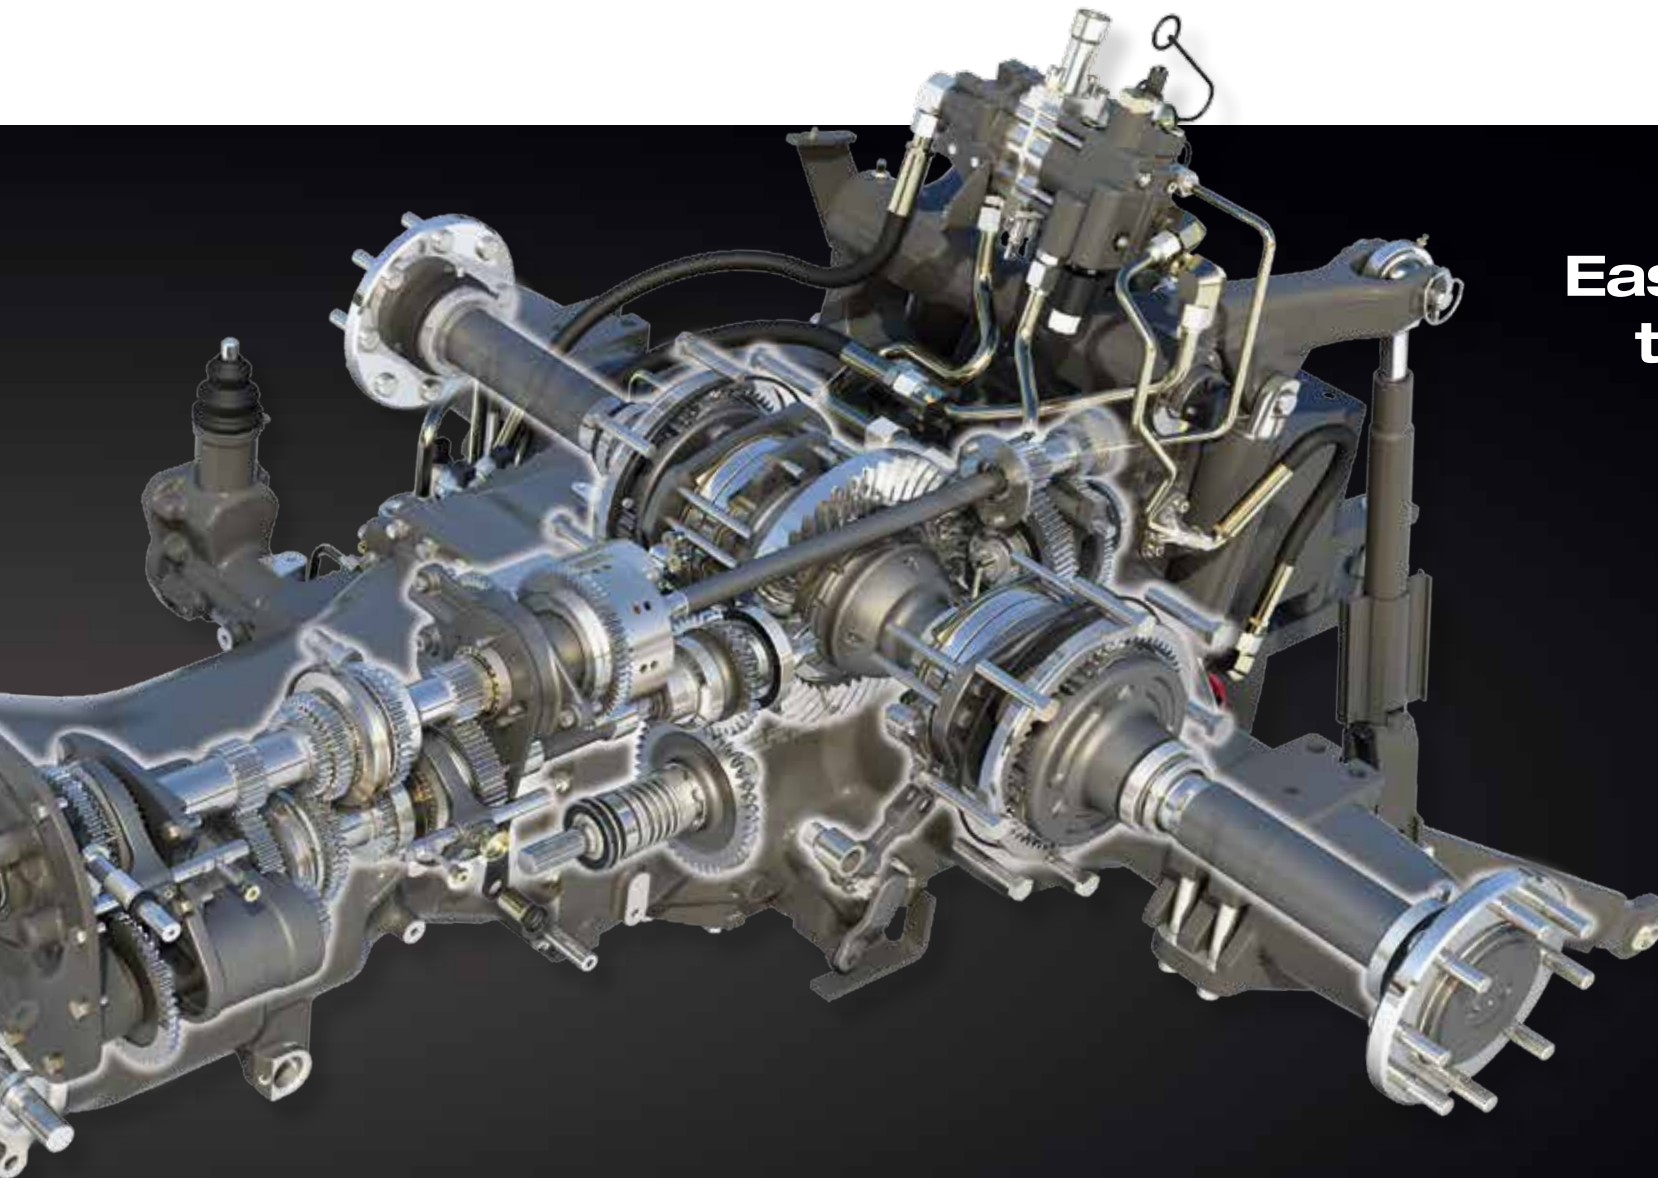

Easy-to-operate transmissions

The Massey Ferguson 4700 Series tractors feature all-new constant mesh and Synchromesh transmissions which provide a total of either eight forward & eight reverse speeds or twelve forward & twelve reverse speeds. Four gears are within the 4-12km/hr typical fieldwork range with the eight speed transmission and seven gears with the twelve speed transmission while maximum speed is 30km/hr.

The right speed for each job is easily selected using gear levers that are within easy reach, yet positioned neatly to hand on each side of the driver or on the instrument console, ensuring an unimpeded passage when mounting/dismounting. A single-plate, dry-type clutch is easy to operate, simple to service.

Moving between forward and reverse at field headlands or around yards, or when hooking up implements, is made easier by a mechanical synchronised forward/reverse shuttle to the driver's left on the eight speed transmission and on the left hand side of the instrument console for the twelve speed transmission.




Easy on the operator


A tractor that has been designed with simplicity of operation at its heart doesn't have to have a basic operator environment. Designed from the outset with an emphasis on comfort and ease of use, the MF 4700 Series tractors make hard work a pleasure. Grab rails mounted outside the operator station provide easy access to the footsteps, mounted directly to the machine, while a low transmission tunnel helps make for a spacious platform. Once seated, manually-operated controls are sited in the most ergonomic positions, making them comfortable to operate and reliable even over the course of many thousands of tractor hours.

The Essential version features an enclosed operator platform with pendent mounted pedals and full width rubber mat providing further comfort.



MF 4708

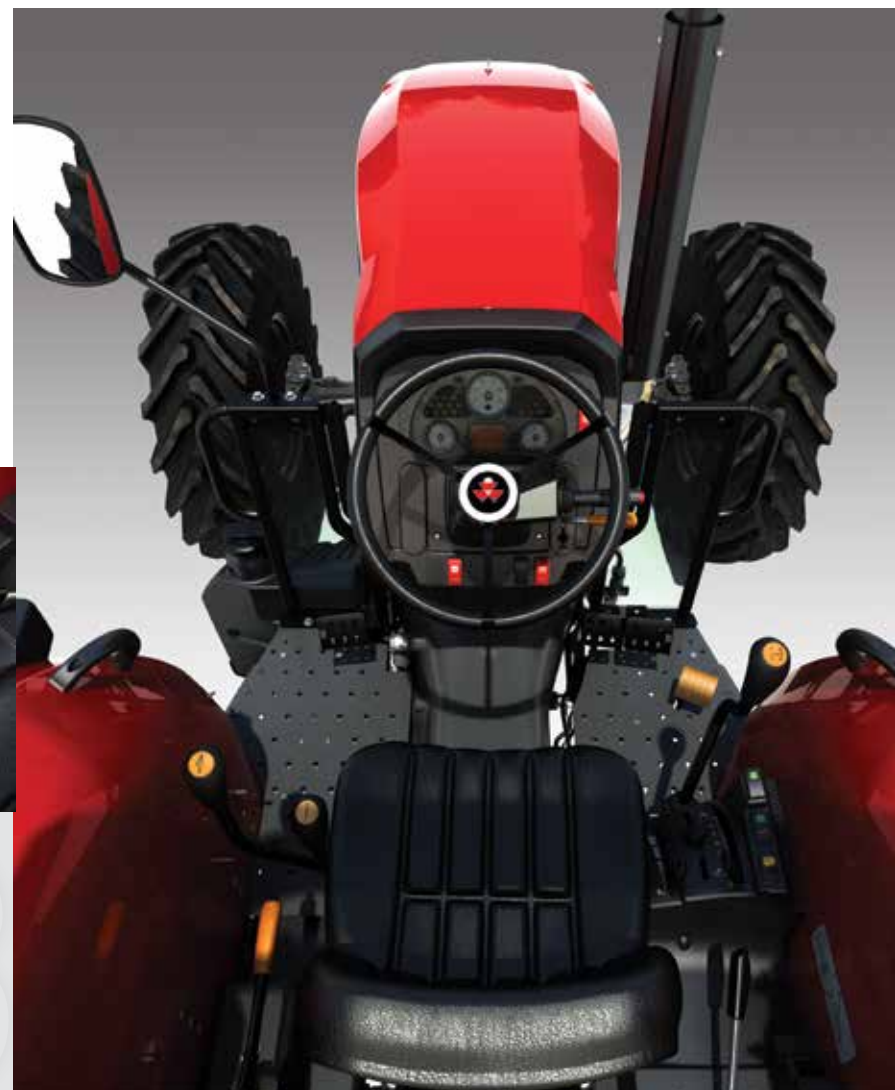


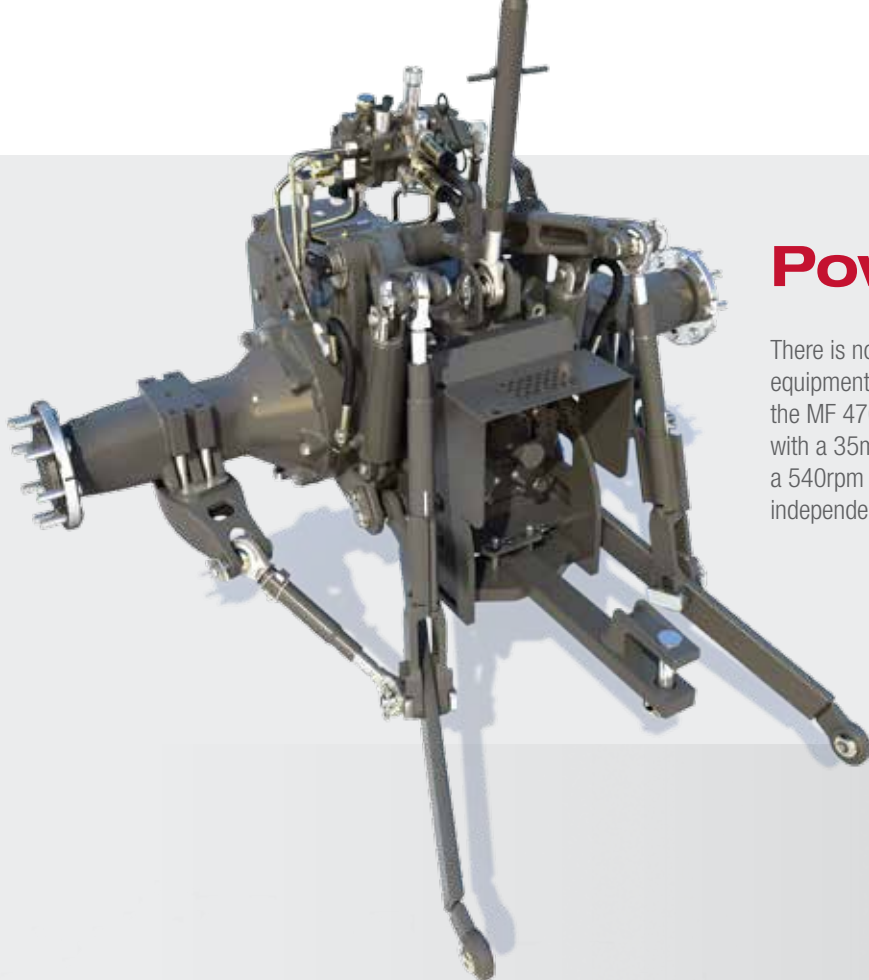

Power any implement

There is no limit to the range of powered equipment that can be put to work behind the MF 4700 Series tractors. All are fitted with a 35mm/six-spline PTO shaft providing a 540rpm PTO speed and protected by an independent PTO clutch (IPTO).

A simple open-centre hydraulic system, powered by a gear-driven pump has a capacity of 65 l/min, allowing the electronically-controlled rear linkages of the MF 4700 Series tractors to lift 3,000kg. In addition, this oil flow is also available via the standard auxiliary spool valve to operate implement hydraulic functions.

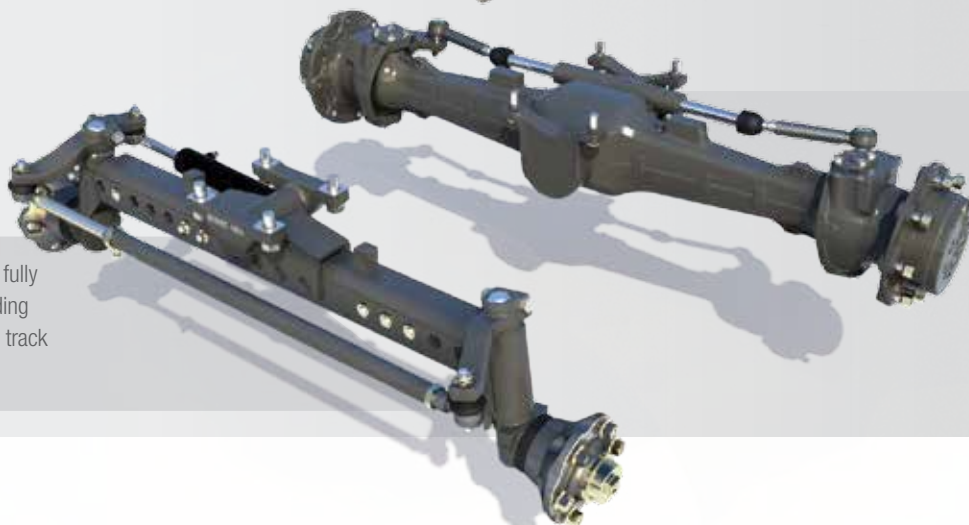

The 2WD axle is fully adjustable providing up to 5 alternate track width settings.

Where enhanced traction is required a 4WD axle can be specified.

In total control

The heavy duty 2WD axle provides enhanced manoeuvrability, reduced weight with 5 alternate track width settings in 102mm steps to suit crop and field conditions. Where additional performance and stability are required a 4WD front axle can be specified. Featuring either a limited slip or hydro-lock differential to maximise traction, the 4WD axle has a 55° steering angle providing high levels of manoeuvrability in all applications.

MF 4708



MF 4708



Product features

1. 4 cylinder AGCO Power Engine
2. 8 x 8 Constant mesh transmission with synchronised shuttle or 12 x 12 Synchromesh transmission with synchronised shuttle
3. Pivoting front bonnet
4. Footstep Operator Station or Semi-platform
5. 2WD and 4WD front axles
6. Electro-hydraulically engaged rear differential lock and 4WD
7. Electronic Linkage Control (ELC)
8. Single Speed 540 rpm Independent PTO
9. 1 Auxiliary spool valve
10. Folding ROPS and Sun canopy
11. Gear Driven Open Centre Hydraulic System
12. 10 x 40 kg Front Weights

Supported by the worldwide might of AGCO and Massey Ferguson

Massey Ferguson dealers can be found in significant numbers in almost every country across the globe. They are run by trained staff who know Massey Ferguson machines inside out, and are able to provide advice, parts, service and support whenever required to keep your Global Series tractor running at its optimum.

And they are backed by the resources of AGCO, parent company of Massey Ferguson and a world leader in farm equipment. So wherever you farm in the world, you can be sure that your Massey Ferguson Global Series tractor will be supported by the best team in the business of farm equipment.



Specifications

Engine Performance		MF 4708 Standard	MF 4708 Essential
Engine hp (kW) power	● ISO hp (kW)	82 (61)	82 (61)
Max torque	@ 1500rpm	342	342
Rated engine speed		2200	2200
Engine		AGCO Power AP44/4/4400cc/Turbocharged	
Engine type/no. of Cylinders/Capacity/Aspiration			
Transmission			
8 x 8 Side shift		●	-
12 x 12 Side shift		-	●
Power Take-off			
IPTO single speed - 540 rpm		●	●
Steering			
Hydrostatic		●	●
Hydraulics			
3-point linkage control		Lever operated ELC	Lever operated ELC
Lift capacity	max kgf	● 3000	● 3000
Oil flow	litres/min	65	65
System pressure	bar	200	200
Spool valves			
		● 1 valve	● 1 valve
Brakes			
Type		Oil immersed	Oil immersed
Standard wheels and tyres			
Front 2wd/4wd		7.50-16 / 340/85 R24	7.50-16 / 340/85 R24
Rear		460/85 R30	460/85 R30
Weights and Dimensions			
Weight without ballast - Footstep	kg - 4WD	3430	3430
Length	mm	4562	4562
Height with ROPS / Canopy	mm - 4WD	2594	2594
Wheelbase	mm	2358	2358
Capacities			
Fuel tank	litres	82	82

● Standard ○ Optional — Not applicable/available ● ISO TR14396

For even greater productivity a range of optional equipment is available including front weights, rear-wheel weights, two-post folding ROPS frame. For full details please consult your local Massey Ferguson dealer.

Dimensions



	MF 4708
4 Wheel Drive	
A – Wheelbase - mm	2358
B – Overall length from front weight frame to rear linkage arms - mm	4562
C – Height to top of canopy	2594
D – Track width - mm	1565 to 1925

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.



MASSEY FERGUSON

A world of experience. Working with you.

Tractor Giants



Call: 012 520 5010

www.tractorgiants.com



MASSEY FERGUSON® is a worldwide brand of AGCO.
© AGCO Limited. 2015 | 15870/0115 | A-English/0115/1m